

# PIZZA PREP TABLE

**MODEL: PPT 44 01**

# PRO-KOLD

## Product features

- Extra deep, removable poly prep surface to handle food and prep properly
- (6) removable, poly-carbonate inserts
- Digital control for easy read-out and temperature adjustment
- Adjustable, interior shelf
- Casters included for maintaining cleanliness under and around unit
- Easy to clean stainless steel floor
- Forced air refrigeration system to promote even cooling throughout food product
- Removable top rail cover lid
- Injected with high density polyurethane foam with cyclopentane.



## Available Color

STAINLESS  
STEEL

## Accessories

- Additional shelves

## Product highlights



Fluorescent Lighting



Intelligent temperature control



Easy access to condensing unit

## Certifications



SAFETY AND SANITATION  
ETL LISTED  
ETL LISTED  
Conforme a UL-471  
Conforme a NSF-7



## Warranty

- 2 year parts and labor
- 3 additional years compressor coverage


Residential: Assumes on liability for parts or labor coverage for component failure, factory defect or any other damages for units installed in non-commercial foodservice or residential applications.

## PRODUCT SPECIFICATIONS


### MODEL: PPT 44 01

## Plan view


Front view



Top view

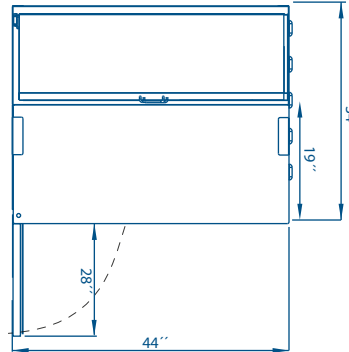

Side view

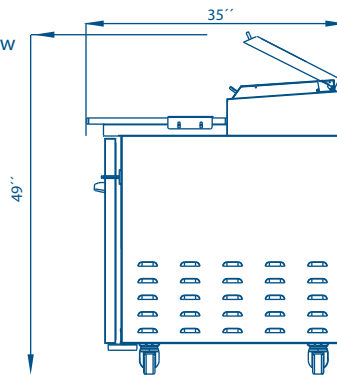

## Technical data

### Dimensions

External dimensions	W: 44" D: 35" H: 41"
Internal dimensions	W:25.23" D: 26.33" H:26.32"
Net volume	10.1 ft3 (286 Lts.)
Net weight	215 Lbs.
Gross weight	316.58 Lbs.
Packaging dimensions	W: 47.31" D: 37.24" H: 43.62"

### Performance data

Refrigerant charge	7.05 oz
Energy consumption	7.254 kwh / 24 hr
Condenser forced	Ventilation forced
Evaporator	Ventilation forced
Evaporation temperature	19.94°F
Expansion method	Capilar
Thawing method	By time

### Construction

Exterior material	Stainless steel
Interior material	Stainless steel floor
Number of shelves	1
Shelf material	Pre-painted metal
Door type	Stainless steel door
Door quantity	1

### Electrical data

Power supply	110v/ 60 Hz
Amps	5.3
Length of cord	118" (3000mm)
Lighting	Fluorescent
Plug type	NEMA-5-15P
Controller	Digital
Compressor power	1/4 HP

### Cooling

Temperature range	36°F to 41°F (Exhibition)
Refrigerant	R134a
Defrosting	Automatic
Temperature controller	Digital
Optimum temperature range	36°F to 41°F (Storage)

### Logistic data

Trailer Loads	54 fit on a 53' trailer
Unit weight with packaging	316.58 Lbs.
Dimensions with packaging	W: 47.31" D: 37.24" H: 43.62"

\* W= Width, D= Depth, H= Height