

REMOTE, FRESH RED MEAT DISPLAY

MODEL: MCRU52W

PRO-KOLD

Product features

- Easily removable, (2) rear sliding doors for ease of loading and unloading product
- Curved front glass for optimal product visibility and maximum marketing potential
- Full length, split display levels for product enhancement and promotion
- Fully adjustable, wire epoxy shelves on upper display level
- High visibility, primary interior display area (32 F - 44 F)
Frozen, undercounter, rear storage area (14F-27F)
- Sliding work table on rear rails that run the length of the unit
- Stainless steel top
- Force air cascade cooling system with interior exhibition gravity cooling system to promote product longevity
- Frontal bumper strategically placed to assist in avoiding accidents and damage to unit
- LED lighting for enhanced product display
- Corrosion resistant, white finish interior with stainless steel top
- Modular design




Available Color

WHITE

Accessories

- Stainless steel fish trays

Product highlights

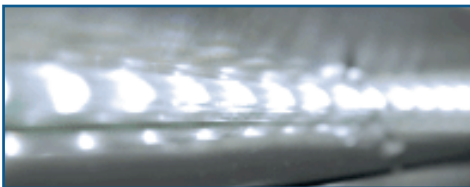

LED Lighting



Sliding, rear work table



Rear, undercounter storage

Certifications



Warranty

- 2 Year parts and labor
- Additional 3 year compressor coverage

Residential: Assumes on liability for parts or labor coverage for component failure, factory defect or any other damages for units installed in non-commercial foodservice or residential applications.


PRODUCT SPECIFICATIONS

MODEL: MCRU52W


PRO-KOLD

Plan view


Front view

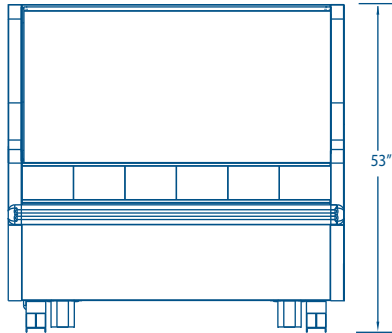

Top view

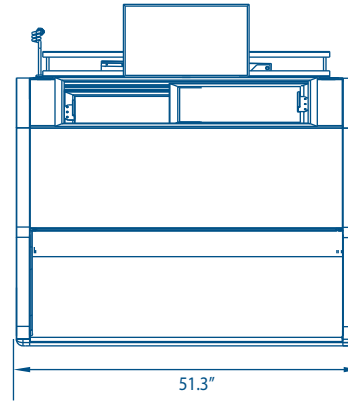

Side view



Technical data

Dimensions

External dimensions	W: 51.3" D: 44" H: 53"
Internal dimensions	W: 47.21" D: 33.38" H: 21.28"
Net volume	15.89 ft3 450 lts
Net Weight	465.62 Lbs
Gross weight	550 Lbs.
Packing dimensions	W: 59 1/2" D: 50 1/2" H: 57 1/2"

Performance data

Refrigerant charge	Not available.
Energy consumption	Not available.
Evaporator	Natural
Evaporation temperature	-04° F
Expansion method	Expansion valve
Thawing method	Hot gas

Construction

Exterior material	Pre-painted sheet
Interior material	Pre-painted sheet
Number of interior shelf levels	2
Shelf material	Steel
Door type	Sliding glass (upper), Solid (lower)
Door quantity	Upper (2), Lower (1)

Electrical data

Power supply	115V/ 60 Hz (lights)
Amps	2.1 A
Length of cord	66.92" 1700 mm
Lighting	LED
Plug type	NEMA-5-15P
Controller	ERC 112
Compressor power	Remote Unit

Cooling

Temperature range	32°F to 46.4°F (Exhibition)
Refrigerant	R404a
Cut In	26.6°F (-3°C)
Cut Out	21.2°F (-6°C)
Condenser	Forced

Logistic data

Trailer Loads	12 fit on a 53' trailer
Trailer Loads	11 fit on a 48' trailer
Unit weight with packaging	550 Lbs.
Dimensions with packaging	W: 59 1/2" D: 50 1/2" H: 57 1/2"

* W= Width, D= Depth, H= Height