

VERTICAL DISPLAY FREEZER

MODEL: DURF32W

PRO-KOLD

Product features

- Intelligent temperature control reduces energy consumption.
- (8) adjustable shelves to fit your display needs.
- LED lights for enhanced product display.
- Self-closing, triple pane glass doors to reduce heat transfer and optimize energy savings.
- Stainless steel interior floor for maximum hygiene and easy cleaning.
- Evaporative condensing pan included, no plumbing required.
- Automatic defrost cycle.
- Forced air cascade system to promote even cooling throughout product displayed.
- Illuminated display to enhance advertising opportunities.
- New customizable and interchangeable advertising display, with LED lighting for highlight your ads.



Product highlights



LED Lighting



Easy access to
condensing unit



Electronic digital
controller

Available Color

WHITE

Accessories

Casters

- Additional shelves

Warranty

- 2 year parts and labor
- Additional 3 year compressor coverage

Certifications




Residential: Assumes on liability for parts or labor coverage for component failure, factory defect or any other damages for units installed in non-commercial foodservice or residential applications.

PRODUCT SPECIFICATIONS

MODEL: DURF32W

PRO-KOLD

Plan view

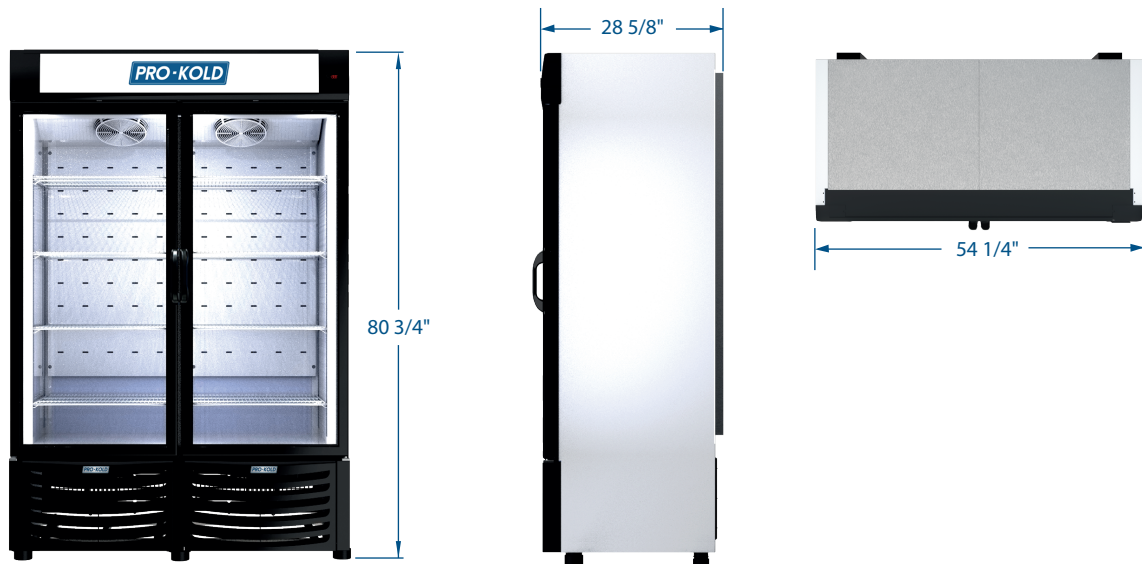

Technical data

Dimensions

| | |
|---------------------|--------------------------------|
| External dimensions | W:54 1/4" D: 28 5/8" H:80 3/4" |
| Internal dimensions | W: 24" D: 21" H:52 1/2" |
| Net volume | 27.79 Ft3 (786 L) |
| Net weight | 205 kg (452 lb) |
| Shelves Dimensions | W: 23-1/2" D:20-1/4" |
| | |
| | |

Performance data

| | |
|--------------------|---------------------------|
| Energy consumption | 10.86 kW/24h |
| Evaporator | Forced air ventilation |
| Thawing method | Electrical by resistances |
| | |
| | |
| | |

Construction

| | |
|-------------------|-------------------------|
| Exterior material | Pre-painted sheet metal |
| Interior material | Pre-painted sheet metal |
| Number of shelves | 8 |
| Shelf material | Pre-painted sheet |
| Door type | Glass Door |
| Door quantity | 2 |

Electrical data

| | |
|----------------|--------------|
| Power supply | 120V/ 60 Hz |
| Amps | 10.29 A |
| Length of cord | 74.80" |
| Lighting | LED |
| Plug type | NEM A 5-15 P |
| Controller | Electronic |
| | |

Cooling

| | |
|-------------------|----------------|
| Temperature range | -4°F to 28.4°F |
| Refrigerant | R-404a |
| Cut In | 6.8 °F |
| Cut Out | -0.4 °F |
| Compressor power | 3/4 HP |
| | |

Logistic data

| | |
|----------------------------|--------------------------|
| Trailer Loads | 27 fit on a 53' trailer |
| Trailer Loads | 24 fit on a 48' trailer |
| Unit weight with packaging | 518 lb |
| Dimensions with packaging | W: 60" D: 36" H: 87 1/4" |
| | |
| | |