

REFRIGERATED 80" DISPLAY CASE

MODEL: DDC80 R290

PRO-KOLD

Product features

- Sliding glass, rear doors for effortless loading and unloading.
- Double pane, curved, front glass which reduces heat transfer and promotes product conservation.
- Fully adjustable stainless steel shelves.
- Stainless steel floor.
- Temperature range 35.6°F to 50°F.
- LED lighting for enhanced product display.
- Easy access to condensing unit and easy cleaning.
- Electronic temperature controller.
- Gravity controlled cooling system.
- 1/2 HP compressor.
- R-290 ecological refrigerant that reduces and optimizes energy consumption.



Product highlights



LED Lighting



Easy access to
compressor



Electronic digital
controller

Available Color

BLACK

WHITE

STAINLESS
STEEL

Accessories

- Castors, lock provided on front set for more security, Castors have a diameter of 4" (102 mm).

Warranty

- 2 year parts and labor
- Additional 3 year compressor coverage

Certifications




Residential: Assumes on liability for parts or labor coverage for component failure, factory defect or any other damages for units installed in non-commercial food service or residential applications.

PRODUCT SPECIFICATIONS


MODEL: DDC80 R290

PRO-KOLD


Plan view

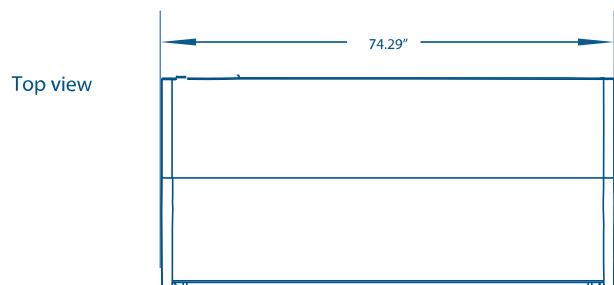

Front view

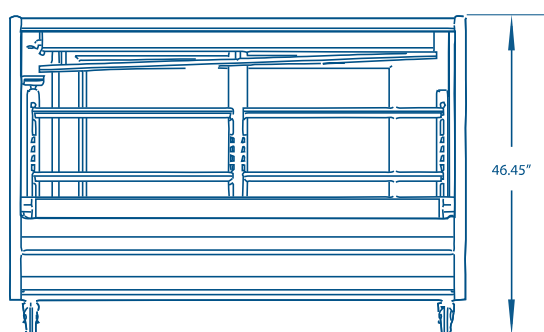

Side view

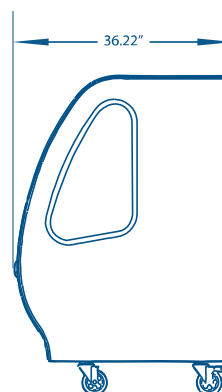

Technical data

Dimensions

External dimensions	W: 74.29" D: 36.22" H: 46.45"
Internal dimensions	W: 71.10" D: 28.81" H: 32.67"
Net volume	20.27 ft ³ (574 L)
Net weight	381 Lb (173 kg.)
Upper Shelves Dimensions	W: 32.81" D: 18.86"
Lower Shelves Dimensions	W: 32.81" D: 22.80"

Performance data

Energy consumption	4.9 kW/24 H
Evaporator	Natural convection
Condenser	Air forced

Construction

Exterior material	Stainless steel, black and white
Interior material	Stainless Steel and White/Black metal sheet
Number of shelves storage	4
Shelf material	Stainless steel
Door type	Sliding glass door
Door quantity	2

Electrical data

Power supply	115 V / 60 Hz
Amps	4.96 A.
Length of cord	74.80" (1900 mm)
Lighting	LED
Plug type	NEM A 5-15 P
Controller	Electronic

Cooling

Temperature range	35.6°F to 50°F (Exhibition)
Refrigerant	R-290
Refrigerant charge	3.88 oz
Cut In	39.2 °F
Cut Out	35.6 °F
Compressor power	1/2 HP

Logistic data

Trailer Loads	15' fit on a 53' trailer
Trailer Loads	13' fit on a 48' trailer
Unit weight with packaging	500 Lb (226.5 kg.)
Dimensions with packaging	W: 81.25" D: 41.5" H: 52.15"