

REMOTE, FRESH RED MEAT DISPLAY

MODEL: MCRU 100WL

PRO-KOLD

Product features

- Double glass on sides: Provides greater visibility from different angles, ideal for a more open display.
- Frontal bumper strategically placed to assist in avoiding accidents and damage to unit.
- Lift front glass for ease of loading, unloading, and cleaning.
- Always ready to stock: It has an internal storage area that allows you to keep backup products.
- Stainless steel advertising display: Useful space to highlight promotions, brands, or features of the product on display.
- Easily removable, (4) rear sliding doors for ease of loading and unloading product.
- White foil interior finish: Reflects light and gives a clean image, highlighting the freshness of the product.
- Ideal temperature: Your products are always at the ideal temperature; its insulation system keeps food fresh without wasting energy.



Available Color

WHITE


Accessories

- Stainless steel fish trays

Product highlights



LED Lighting

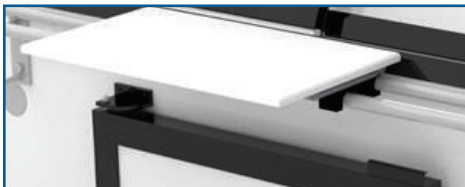

Sliding, rear work table



Rear, undercounter storage

Certifications



Residential: Assumes on liability for parts or labor coverage for component failure, factory defect or any other damages for units installed in non-commercial foodservice or residential applications.

Warranty


- 2 Year parts and labor
- Additional 3 year compressor coverage

PRODUCT SPECIFICATIONS


MODEL: MCRU 100WL

PRO-KOLD


Plan view

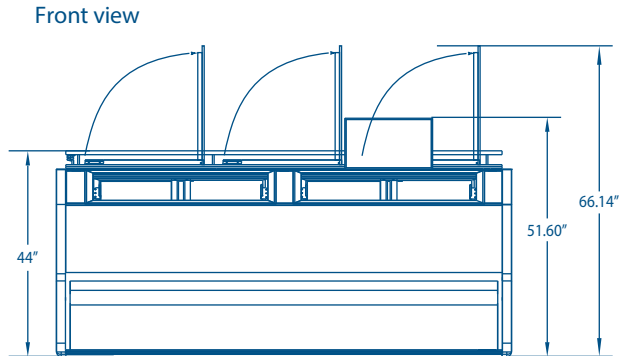

Top view

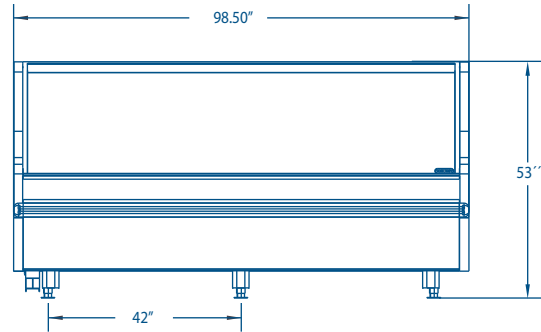

Side view

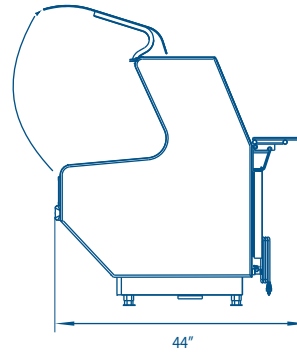

Technical data

Dimensions

External dimensions	W: 98.5" D: 44" H: 53"
Internal dimensions	W: 94" D: 33" H: 20"
Net volume	26 ft ³ (750 L)
Net Weight	940.2 Lb.
Gross weight	960 Lb.
Packaging dimensions	W: 100" D: 53" H: 55"

Performance data

Refrigerant charge	Not available
Energy consumption	Not available
Compressor Power	Remote unit
Evaporation temperature	-13 °F (-25°C)
Expansion method	Expansion valve
Defrost method	Hot gas

Construction

Exterior material	Pre-painted sheet
Interior material	Pre-painted sheet
Number of interior shelf levels	2
Shelf material	Pre-painted steel
Door type	Sliding glass (upper), Solid (lower)
Door quantity	Upper (4), Lower (3)

Electrical data

Power supply	120V/ 60 Hz
Amps	4.2 A
Length of cord	74.80" (1900 mm)
Lighting	LED
Plug type	NEM A 5-15 P
Controller	Mechanic

Cooling

Display temperature	0°C a -8°C
Display evaporator	Natural convection
Storage Temperature	-5°C a -15°C
Storage Evaporator	Forced convection
Cut In	-7°C
Cut Out	-15°C

Logistic data

Trailer Loads	12 fit on a 53' trailer
Unit weight with packaging	960 lb
Dimensions with packaging	W: 100" D: 53" H: 55"

* W= Width, D= Depth, H= Height

* For further information on the proper selection of the condensing unit for your display case, please identify the model of your equipment and share it with your authorized Pro-kold distributor to receive technical assistance