

Refrigerated 56" Display Case

MODEL: DDC60

PRO-KOLD

Product features

- Sliding glass, rear doors for effortless loading and unloading
- Double pane, curved, front glass which reduces heat transfer and promotes product conservation
- Fully adjustable stainless steel shelves
- Stainless steel floor
- Temperature range from 35.6°F to 50°F
- LED lighting for enhanced product display
- Easy-lift front covers for access to condensing unit and easy cleaning
- Electronic temperature controller
- Gravity controlled cooling system
- 1/3 HP compressor
- R134a refrigerant that reduces and optimizes energy consumption



Available Product Finishes

BLACK


WHITE

STAINLESS
STEEL

Accessories

- Castors, Lock provided on front set for more security, Castors have a diameter of 4" (102mm).

Product highlights

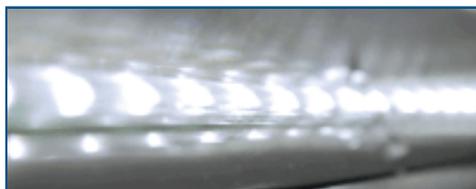

LED Lighting



Electronic Digital Controller



Easy Access to Compressor

Certifications



SAFETY AND SANITATION
ETL LISTED
Conforms to UL-471
ETL LISTED
Conforms to NSF-7




Warranty

- 2 Year parts and labor
- Additional 3 year compressor coverage

Residential: Assumes on liability for parts or labor coverage for component failure, factory defect or any other damages for units installed in non-commercial foodservice or residential applications.

Plan view

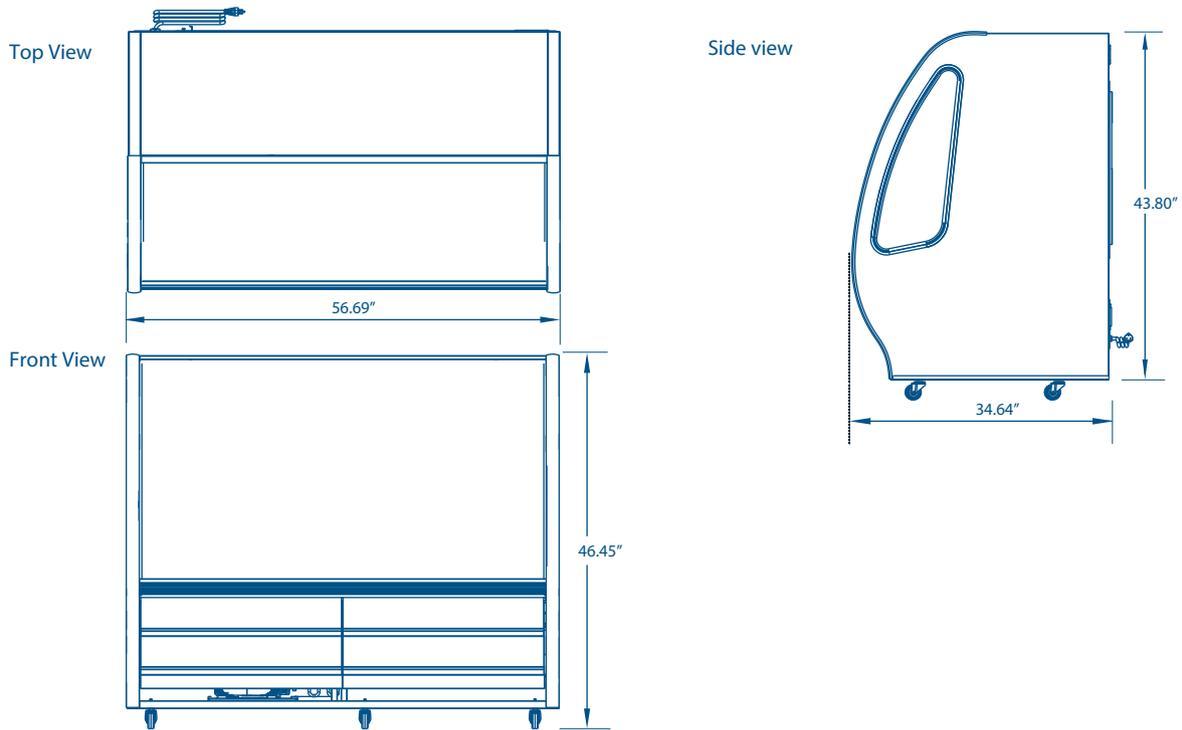

Technical data

Dimensions

External dimensions	W: 56.69" D: 34.64" H: 46.45"
Internal dimensions	W: 53" D: 29.52" H: 32.67"
Net volume	21 ft3 (594 Lts.)
Net weight	334.6 Lbs.
Gross weight	425 Lbs.
Upper shelf dimensions	W: 24.01" D: 14.96"
Lower shelf dimensions	W: 24.01" D: 18.89"

Electrical data

Power supply	115v/ 60 Hz
Amps	7.77 A
Length of cord	74.80" (1900 mm)
Lighting	LED
Plug type	NEMA-5-15P
Controller	ERC 112
Compressor power	1/3 HP

Performance data

Refrigerant charge	7.76 oz
Energy consumption	6.28 KW/24HRS
Evaporator	Natural convection
Evaporation temperature	8.6°F (-13°C)
Expansion method	Capilar
Thawing method	Natural

Cooling

Temperature range	35.6°F to 50°F (Exhibition)
Refrigerant	R134a
Cut In	41°F (5°C)
Cut Out	33.8°F (1°C)
Condenser	Maintenance free

Construction

Exterior material	Stainless Steel,Black, White
Interior material	Stainless Steel
Number of shelf storage	4
Shelf material	Stainless Steel
Door type	Sliding glass door
Door quantity	2

Logistic data

Trailer Loads	15 fit on a 53' trailer
Trailer Loads	14 fit on a 48' trailer
Unit weight with packaging	425.49 lb (193 kg)
Dimensions with packaging	W: 59" D: 37" H: 52.7"

* W= Width, D= Depth, H= Height