

## SPEC SHEETS

**MODEL: SSC-45-2S**

# Vertical Reach In Refrigerator

**PRO-KOLD**

## Product features

- Digital Temperature Controller with automatic defrost function
- Includes six electrostatically painted shelves
- Corrosion Resistant stainless steel exterior and interior
- Eco- Friendly R-290 Refrigerant
- Self Closing doors
- Door Locks
- Heavy duty Casters
- LED Lighting
- Safety and Sanitation Listed



## Available Color

Stainless  
steel

## Accessories

- Steel Shelves

## Product Highlights



Digital Temperature Controller



Heavy Duty Casters



Electrostatically painted Shelves

## Certifications



## Warranty

- 2 year parts and labor
- Additional 3 year compressor coverage


Residential: Assumes on liability for parts or labor coverage for component failure, factory defect or any other damages for units installed in non-commercial foodservice or residential applications.

## PRODUCT SPECIFICATIONS

### MODEL: SSC-45-2S

# PRO-KOLD

## Plan view

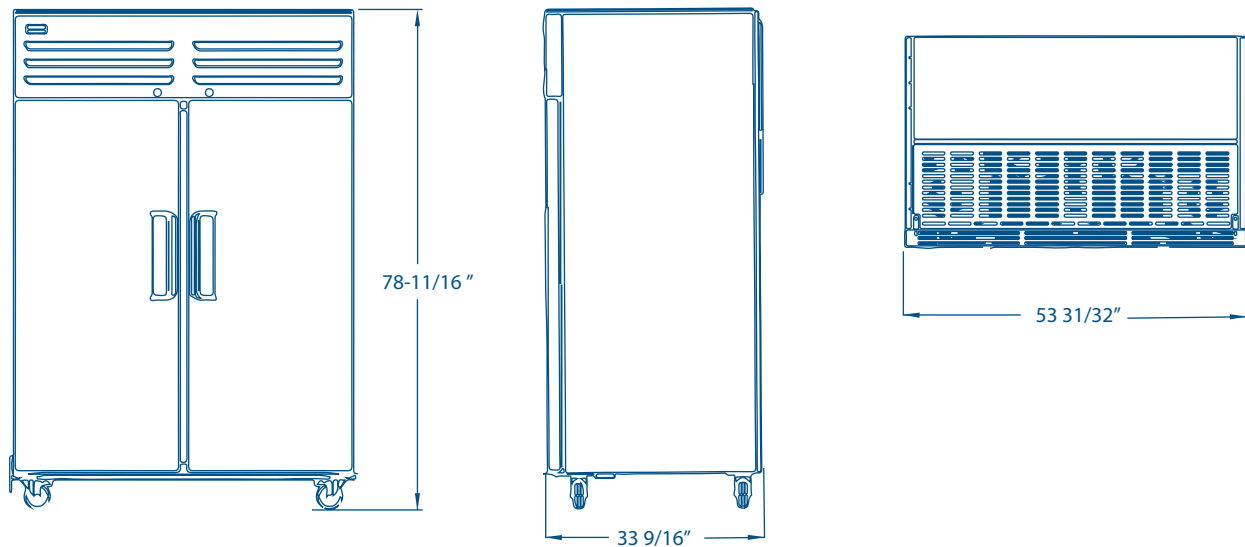

## Technical data

### Dimensions

External dimensions	W:53 31/32 " D:33 9/16" H:78 11/16"
Internal dimensions	W:48 17/64" D:26 5/8 " H:52 "
Net volume	34 ft3 963 L
Net weight	437 lbs
Gross weight	492 lbs
Shelves Dimensions	W: 22 15/16" D:23 5/16"

### Performance data

Refrigerant charge	3.2 oz
Energy consumption	2.93 kW/24Hrs
Evaporator	Forced ventilation
Expansion method	Capillary
Thawing method	Natural

### Construction

Exterior material	Stainless steel and Galvanized steel
Interior material	StainlessSteel
Number of shelves	6
Shelf material	Electrostatically painted steel
Door type	Solid (Stainless steel)
Door quantity	2

### Electrical data

Power supply	115V/ 60 Hz
Amps	5.3 A
Length of cord	125 63/64 " (3200mm)
Lighting	LED
Plug type	NEMA 5-15P
Controller	Electric
Compressor power	1/3 HP / 841 W

### Cooling

Equipment operating range	77 to 100.4 °F (25 to 38°C)
Controller temperature range	34.5 to 41.0 °F (1.38 to 5°C)
Set Point	35.4 °F (1.88°C)
Cut In	38.5 °F (3.61°C)
Cut Out	35.4 °F (1.88°C)
Refrigerant	R290
Condenser	Wire and tube

### Logistic data

Trailer Loads	26 fit on a 53' trailer
Trailer Loads	23 fit on a 48' trailer
Unit weight with packaging	492 lbs
Dimensions with packaging	W: 60" D: 37 3/4" H: 82 1/4"